



# *The FATBOY*

Tramp Oil Separator  
Decant system for large flowrates



1,200 gallon bottom decant tank with oil collecting underflow weir area, 4" floating skimmer and automated solids discharge valve.

(1) High flowrate skimmer(s) capable of 30-35 GPM - 2" solids handling diaphragm pumps.

Optional (2) skimmers allowing for up to 60-70 GPM for large turnover rates of sumps.

*Fatboy* Tramp Oil Separator capable of flowing 10-15 GPM of concentrated oily water with automatic oil discharging and cleaning of settled & suspended solids.

Automated PLC controls with HMI touch screen controls.

Optional Ozone injection available for reducing or removing bacteria.





Tel: (734) 744-6446  
Livonia, Michigan  
[www.Filtertechno.com](http://www.Filtertechno.com)



# *The FATBOY*

Tramp Oil Separator  
Decant system for large flowrates

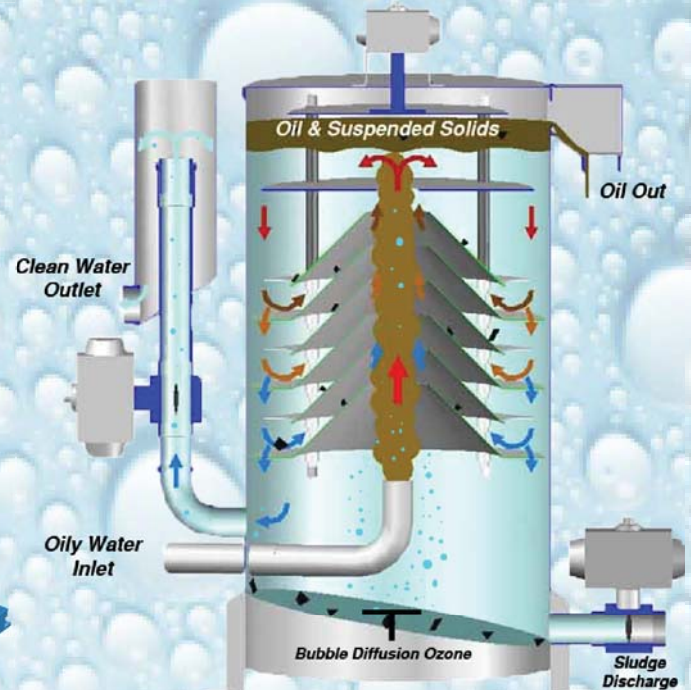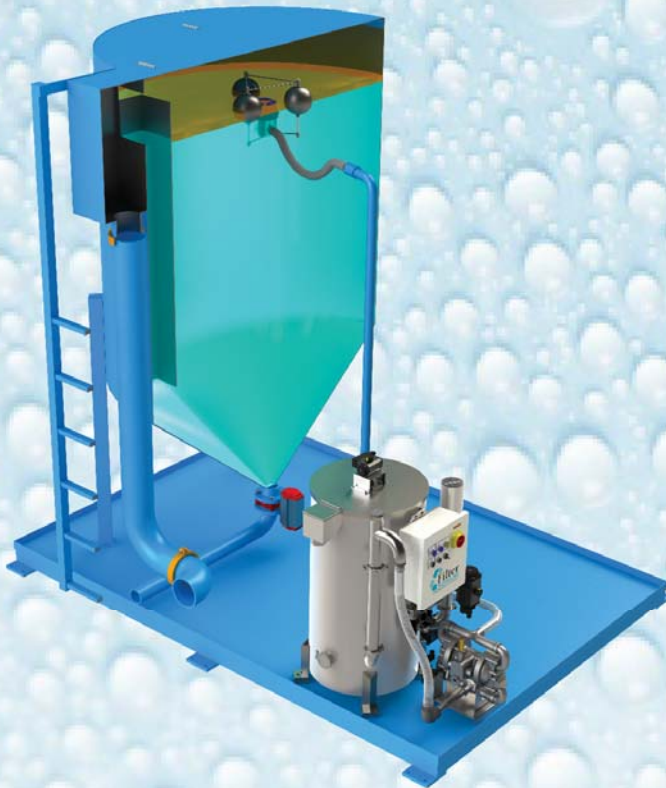

*Fatboy* Tramp Oil Separator with optional Ozone injection system for bacterial control.



Tel: (734) 744-6446  
Livonia, Michigan  
[www.Filtertechno.com](http://www.Filtertechno.com)